

## Technical Data

## ACRYLITE® AR abrasion resistant acrylic sheet

### Product Description

ACRYLITE AR sheet is a continuously manufactured acrylic sheet that has excellent abrasion and chemical resistant properties with outstanding optical quality. It is available with coating on one side or two sides. While two-side coated sheet provides maximum protection, one-side coated sheet offers economical advantages for applications where only one side of the sheet is exposed. In addition, the uncoated side is ideal for silkscreening.

### Properties

ACRYLITE AR sheet provides the following outstanding properties:

- Optical clarity
- Abrasion resistance
- Chemical resistance
- Ease of fabrication
- Light weight – half the weight of glass
- Strength – many times the impact strength of glass

ACRYLITE AR sheet resists marring and scratching from everyday public contact, daily cleanings and airborne dirt and dust that are found in many applications. This property significantly extends the service life of the product. Although the coating provides an extremely hard surface to resist these abuses, it is not resistant to intentional gouging with sharp tipped objects, such as knives or screwdrivers.

Because ACRYLITE AR sheet offers protection from chemical attack, many household glass cleaners can be used on the coated surfaces. Recommended cleaning agents and chemical resistance information can be found on page 3.

### Applications

ACRYLITE AR sheet is ideal for a wide variety of applications including:

#### One-Sided Coating

- Glazing
- P-O-P Displays
- Store Fixtures
- Menu Boards
- Electronic Displays
- Museum Displays
- Signs & Directories
- Furniture & Interiors
- Framing

#### Two-Sided Coating

- Sports Arena Glazing
- Architectural Glazing
- Security Glazing
- Automotive Interiors
- Instrument Cluster Panels



**Acrylite® AR**  
ACRYLIC SHEET

### Availability

Thicknesses from: .060" – .944" (1.5 mm – 24.0 mm)


Standard sheet sizes: 48" x 96" (1220 x 2440 mm)  
60" x 96" (1525 x 2440 mm)  
72" x 96" (1830 x 2440 mm)

Custom sizes up to: 72" x 120" (1830 x 3050 mm)  
depending on thickness.

The abrasion resistant coating is available on one or two sides and is easily identified by the printed paper masking. A polyethylene masking is also available.


## Abrasion Resistance

Assessing how well a product will perform under the conditions of an application must take into account the type of abuse or abrasion the product will encounter. Abrasion can be divided into three types. Scratching is the most common type of abrasion and is often caused by frequent cleaning and handling. Resistance to scratching is evaluated by using a rotary brass wool test in which a coarse brass scouring pad is rubbed on the coated sheet surface by automated test equipment. Resistance to wear is measured by exposing a sample to continuous contact with an abrasive wheel in the Taber abrasion test. Resistance to particle impacts, such as sand, is measured using the falling sand test. This test simulates the type of abrasion typically experienced by a motor vehicle windshield. The following graphs show typical test data demonstrating the outstanding properties that ACRYLITE AR sheet offers versus conventional uncoated acrylic sheet.

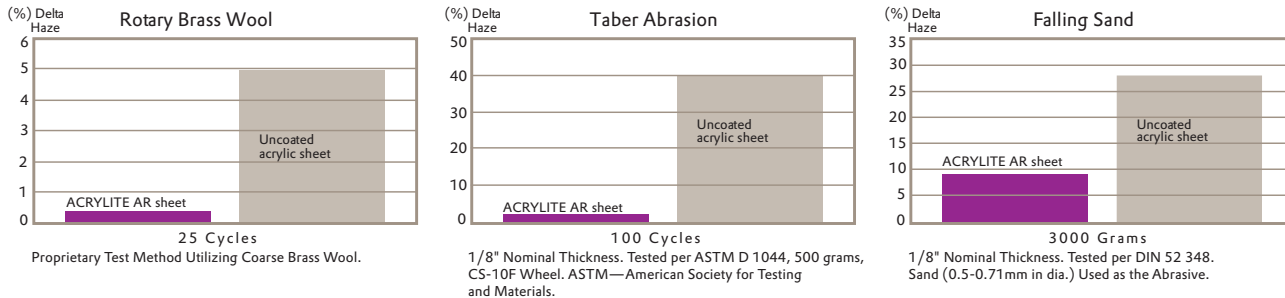

## Weathering

ACRYLITE AR sheet maintains its original appearance and color despite heat, cold, sunlight and humidity. It withstands the adverse effects of outdoor weathering and has been found to experience no significant loss of light transmittance or any appreciable increase in yellowing after an accelerated weathering period of 3000 hours, Xenon Arc. This should ensure many years of trouble free performance.

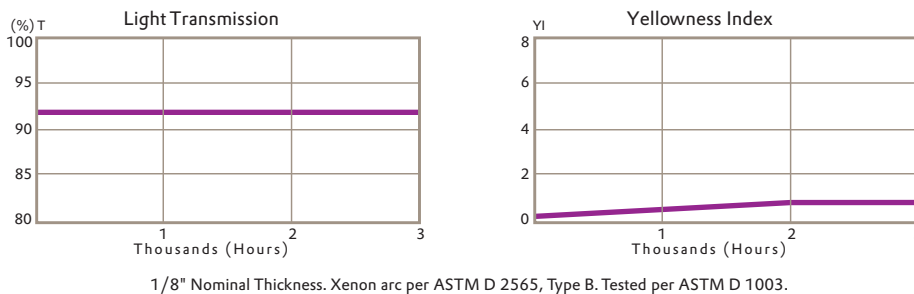

## Physical Properties

Property	ASTM Method	Typical Substrate Value (3.0mm Thickness)
<b>Mechanical</b>		
Tensile Strength	D 638	10,000 psi (69 M Pa)
Elongation, Rupture	—	4.5%
Modulus of Elasticity	—	400,000 psi (2800 M Pa)
Flexural Strength	D 790	17,000 psi (117 M Pa)
Modulus of Elasticity	—	480,000 psi (3300 M Pa)
Izod Milled Notched	D 256	0.4 ft.lbs/in.(21.6 J/m) of notch
<b>Optical</b>		
Light Transmission, Total	D 1003	92%
<b>Thermal</b>		
Deflection Temperature Under Load (264 psi)	D 648	195°F (91°C)
Vicat Softening Point	D 1525	220°F (105°C)
Coefficient of Linear Thermal Expansion	D 696	0.000040 in/in•°F (.000068 m/m•°C)
Coefficient of Thermal Conductivity	C 177	1.3 BTU/hr.ft. <sup>2</sup> •°F/in (.19W/m•°K)
<b>Flammability</b>		
Burn Rate	D 635	1.0 in/min (25 mm/min)
Self-Ignition Temperature	D 1929	830°F (443°C)
Smoke Density Rating	D 2843	10%
<b>Abrasion Resistance of the Coating</b>		<b>Change in Haze</b>
Rotary Brass Wool (25 cycles)	Proprietary method	< 1%
Taber Abrasion (100 cycles)	D 1044	< 2%
Falling Sand (3,000 grams)	DIN 52 348	< 10%

## Chemical Resistance

The following table shows typical test data demonstrating the resistance of ACRYLITE AR sheet to various chemicals versus uncoated sheet. Note: some chemicals will attack edges and uncoated surfaces of sheet.

Chemical	ACRYLITE AR sheet	Standard acrylic sheet
Acetone	> 24 hrs	< 15 min
Ethylene Dichloride	> 24 hrs	< 15 min
Gasoline	> 24 hrs	> 24 hrs
Hydrochloric Acid	> 24 hrs	> 24 hrs
Methyl Alcohol	> 24 hrs	> 24 hrs
Methylene Chloride	> 24 hrs	< 15 min
Methyl Ethyl Ketone	> 24 hrs	> 15 min
Nitric Acid	< 24 hrs	< 15 min
Sodium Hydroxide	> 24 hrs	< 24 hrs
Sulfuric Acid	> 24 hrs	< 15 min
Toluene	> 24 hrs	< 15 min
Isopropanol	> 24 hrs	> 24 hrs
Kerosene	> 24 hrs	> 24 hrs

Testing the resistance of these chemicals was conducted per ASTM D 1308. Time intervals for visually inspecting the sheet surface: 15 minutes, 1 hour and 24 hours. The table shows the time it took the chemical to visually attack the surface.

## Fabrication

ACRYLITE AR sheet can be stored, saw cut, drilled, routed, milled and laser cut using the same tooling and techniques that are used when machining ACRYLITE® FF acrylic sheet. Please refer to ACRYLITE sheet Technical Briefs for details on how to perform certain machining steps or to find manufacturers of equipment and tooling. When performing any type of machining operation to ACRYLITE AR sheet, it is recommended to leave the protective masking on the sheet.

There are certain operations that are not recommended for ACRYLITE AR sheet. They may damage, or in some manner, adversely affect the performance of the abrasion resistant coating. The following operations have fabrication restrictions:

**Edge Preparation:** Scraping, wet sanding, and buffing are acceptable methods of preparing a finished edge. **Flame polishing is not recommended.** Overspray from the flame will cause the surface coating to crack or craze. This may lead to delamination of the coating and a loss of abrasion resistance in the affected area.

**Cementing:** ACRYLITE AR sheet is available with the abrasion resistant coating on one or two sides. When cementing to a non-coated surface, use the same solvent or polymerizable cements commonly used on ACRYLITE sheet. Solvent cementing to an abrasion resistant coated side requires surface preparation. To solvent cement to the coated side, the coating must first be removed by wet sanding or routing. When removing the coating, ensure that the bonding surface is flat, clean and free of stress. Annealing the piece will ensure a stress free surface. Refer to Technical Brief # 8 "Cementing" for details, procedures and a list of acceptable cements.

**Thermoforming:** Line bending or thermoforming ACRYLITE AR sheet is not recommended. Due to differences in the thermal properties of the coating and substrate, these heating processes can lead to delamination of the coating.

**Painting, Silkscreening:** The abrasion resistant coating provides chemical resistance which will prevent some inks or paints from adhering properly. *NOTE: the uncoated side of the one-side coated product is ideal for these applications. Contact our Technical Center for more information.*

## Cleaning

A liquid detergent and water solution is the recommended cleaner for ACRYLITE AR sheet. While the use of abrasive cleaners is not recommended, the following brand name cleaners have been tested and found to work well on coated surfaces.

**CAUTION: Some of these cleaners may attack the uncoated side or edges of the sheet.**

Fantastik® household cleaner	Mr. Clean® household cleaner
Formula 409® household cleaner	Top Job® household cleaner
Glass Plus® cleaner	Windex® window cleaner

Never use mechanical methods, such as razor blades, putty knives or scrapers on the surface of the sheet. This may lead to gouging and removal of the abrasion resistant coating.

**Graffiti Removal:** Several solvents and cleaning agents are effective in graffiti removal. Although ACRYLITE AR abrasion resistant sheet has excellent chemical resistance, cleaners and solvents should be tested before using to ensure that they do not harm the coating. Avoid exposure of edges and uncoated sheet surface to cleaning agents. For additional information, visit our TechKnowlogy Center at [www.acrylite.net](http://www.acrylite.net).

**Recommended Cleaners:** Due to the varying nature of graffiti, some cleaning agents will be more effective at removal than others. Two cleaning agents below have been found to work well on a variety of graffiti. Be sure to read the supplier's MSDS and follow their directions carefully for handling, use and disposal of the cleaner.

Commercial Remover: GRAFFITI TERMINATOR REMOVER, Genesis Coatings, Inc., 800 533-4273

Solvent: TOLUENE, Mallinckrodt Baker, Inc., 800 582-2537

**Procedure:** Apply the cleaner generously, avoiding contact with uncoated surfaces. Allow the cleaner to penetrate the graffiti for 2 – 5 minutes. Remove the graffiti by rubbing with a soft cloth. Repeat these steps as needed to remove the graffiti. A plastic putty knife or smoother blade (found in the wallpaper section of a home improvement store) may be used to scrape at stubborn or hardened paints, but care must be taken not to gouge the coating. Never use a razor blade, metal knife or scraper. Wash the area with mild soap and water to remove residue.

## Code Approval

ACRYLITE AR sheet meets the requirements of the following codes and regulations:

ANSI Z 97.1 for Safety Glazing Materials Used in Buildings

ANSI Z26.1, AS-4, 5, 6 & 7 for Safety Glazing Materials for Glazing Motor Vehicles

Uniform Building Codes for use as a Light Transmitting Plastic:

- See BOCA Evaluation Services, Inc., Research Report # 94-30
- ICBO Evaluation Service, Inc. Evaluation Report # 3715-CC2 Classification
- SBCCI PST & ESI Evaluation Report # 95112A
- City of Los Angeles, Research Report RR 24392
- Wisconsin Material Approval, Approval # 950043-L

Consumer Products Safety Commission, Safety Standard for Architectural Glazing Materials, 16CFR 1201, Categories I & II

UL Recognized Component, File # E54671: UL Flammability Ratings: HB in all thicknesses

### Flammability:

ACRYLITE GAR sheet is a combustible thermoplastic. Precautions should be taken to protect this material from flames and high heat sources. ACRYLITE GAR sheet usually burns to completion if not extinguished. The products of combustion, if sufficient air is present, are carbon dioxide and water. However, in many fires sufficient air will not be available and toxic carbon monoxide will be formed, as it will when other common combustible materials are burned. We urge good judgment in the use of this versatile material and recommend that building codes be followed carefully to assure it is used properly.

ACRYLITE® is a registered trademark of Evonik Cyro LLC in the Americas. These same products are manufactured and marketed under the PLEXIGLAS® trade name on the European, Asian, African and Australian continents.

### Important Notice:

This information and all technical and other advice are based on Evonik's present knowledge and experience. However, Evonik assumes no liability for such information or advice, including the extent to which such information or advice may relate to third party intellectual property rights. Evonik reserves the right to make any changes to information or advice at any time, without prior or subsequent notice. EVONIK DISCLAIMS ALL REPRESENTATIONS AND WARRANTIES, WHETHER EXPRESS OR IMPLIED, AND SHALL HAVE NO LIABILITY FOR, MERCHANTABILITY OF THE PRODUCT OR ITS FITNESS FOR A PARTICULAR PURPOSE (EVEN IF EVONIK IS AWARE OF SUCH PURPOSE), OR OTHERWISE. EVONIK SHALL NOT BE RESPONSIBLE FOR CONSEQUENTIAL, INDIRECT OR INCIDENTAL DAMAGES (INCLUDING LOSS OF PROFITS) OF ANY KIND. It is the customer's sole responsibility to arrange for inspection and testing of all products by qualified experts. Reference to trade names used by other companies is neither a recommendation nor an endorsement of the corresponding product, and does not imply that similar products could not be used.




### Evonik Cyro LLC

379 Interpace Parkway  
Parsippany, NJ 07054

PHONE +1 973 541-8000

[www.acrylite.net](http://www.acrylite.net)  
[www.acrylite-shop.com](http://www.acrylite-shop.com)  
[www.evonik.com](http://www.evonik.com)



### Technical Support

Visit the TechKnowlogy Center at [www.acrylite.net](http://www.acrylite.net) where visitors have immediate access to FAQs, technical information, tips, and hundreds of other facts about ACRYLITE acrylic products.

© 2009 Evonik Cyro LLC. All Rights Reserved. Printed in USA.

1970A-909-Cyro