


XtremeFLEX™ Standard Insulated Heating Tapes (B00 Series)



Specifications:

- Maximum Exposure Temperature: 900°F (482°C)
- Fiberglass Knit and Braided Construction
- Nominal Watts per Square Inch (mm): 8.6 (0.013)
- Choice of Power Lead on Same End or Opposite Ends
- 120 or 240VAC
- Includes High Temperature Tie Downs

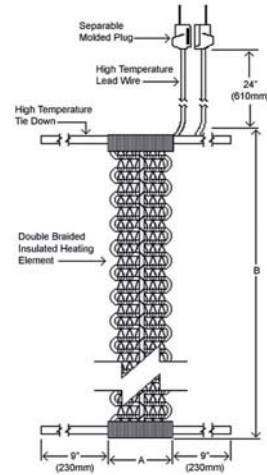

Temperatures up to



900°F (482°C)

Additional Item Needed



Temperature Controller

Fiberglass Insulated 900°F/482°C

Size A in (mm)	Size B in (mm)	Total Watts	Part No. 120VAC	Part No. 240VAC
.5 (13)	36 (920)	157	RH36	N/A