



PRODUCT INFORMATION

OC® FABRICS OC® DOUBLE BIAS FABRICS (±45°)

PRODUCT DESCRIPTION

OC® Double Bias Fabrics are a stitch-bonded composite reinforcement combining equal amounts of continuous fiber oriented in the +45° and -45° directions into a single fabric. This construction offers off-axis reinforcement without the need to rotate other materials on a bias. The versatile fabric, made from high-quality fibers, is available in a variety of widths and weights to meet your particular requirements. The input fibers are designed to give controlled wet-out and excellent laminate properties. Each fabric can be combined with a glass mat or veil for enhanced performance, surface finish or handling.

PRODUCT APPLICATION

OC Double Bias Fabrics offer superior structural performance in applications subject to extreme shear and torsion stress. These properties are ideal for applications such as wind blades, marine panels, and snowboards. These fabrics offer improved conformability over biaxial fabrics yet maintain comparable laminate properties, making them ideal for placement within complex parts. Reduced fabric print-through results in enhanced aesthetics on finished products while offering material and labor savings.


FEATURES

- CRIMP-FREE CONSTRUCTION
- OPPOSING ±45° FABRIC CONSTRUCTION OFFERS RESISTANCE TO TWISTING
- EXCELLENT CONFORMABILITY
- REDUCE PRINT-THROUGH
- CAN BE COMBINED WITH VARIOUS MATS (CONTINUOUS FILAMENT MAT, WET FORMED MAT, CHOPPED STRANDS AND VEIL)
- AVAILABLE IN A VARIETY OF WIDTHS AND WEIGHTS

PRODUCT BENEFITS

- IMPROVED FIBER ALIGNMENT AND MECHANICAL PROPERTIES
- FINISHED PARTS PERFORM UNDER EXTREME SHEAR AND TORSION STRESS
- IMPROVED PLACEMENT IN COMPLEX PARTS
- ENHANCED AESTHETICS WITH MATERIAL AND LABOR SAVINGS
- IMPROVED PRINT-THROUGH, COST-EFFECTIVE SECONDARY BONDING, AND HANDLING
- OFFERS SOLUTIONS FOR WIDE RANGE OF APPLICATIONS

PRODUCT NOMENCLATURE

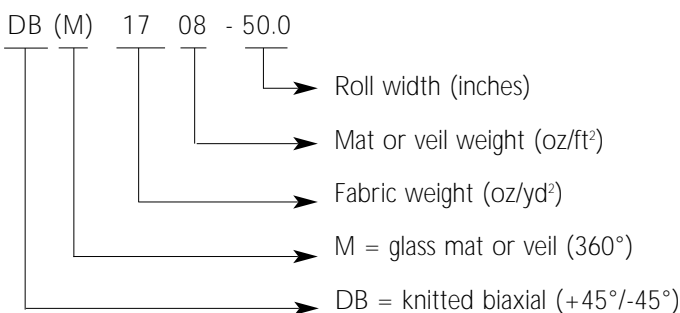



OC® FABRICS OC® DOUBLE BIAS FABRICS (±45°)

PHYSICAL PROPERTIES / AVAILABLE PRODUCTS

FABRIC STYLE	TOTAL WEIGHT (OZ/YD ²)					MAT	DRY THICKNESS (INCHES)
		0°	90°	+45°	-45°		
DB120	11.6	0	0	5.6	5.6	0	0.021
DBM1208	19.3	0	0	5.6	5.6	7.6	0.037
DB170	17.6	0	0	8.6	8.6	0	0.029
DBM1708	24.9	0	0	8.6	8.6	7.6	0.044
DBM1708G	24.9	0	0	8.6	8.6	7.6	0.044
DBM1715	31.2	0	0	8.6	8.6	13.5	0.049
DBM1715G	31.2	0	0	8.6	8.6	13.5	0.049
DB240	24.7	0	0	12.1	12.1	0	0.034
DBM2408	32.3	0	0	12.1	12.1	7.6	0.048
DBM2408G	32.3	0	0	12.1	12.1	7.6	0.048
DBM2415	38.2	0	0	12.1	12.1	13.5	0.057
DBM2415G	38.2	0	0	12.1	12.1	13.5	0.057

SAMPLE MECHANICAL PROPERTIES

Sample Mechanical Properties of Laminate based on DB170 (50% glass content by weight).

	ENGLISH UNITS	SI UNITS
Tensile (ASTM D 638)		
Strength	39.8 ksi	274 MPa
Modulus	2.18 msi	15.0 GPa
Compression (ASTM D 695)		
Strength	36.6 ksi	252 MPa
Modulus	2.06 msi	14.2 GPa
Flexural (ASTM D 790)		
Strength	69.9 ksi	482MPa
Modulus	2.00 msi	13.8 GPa

Sample Mechanical Properties of Laminate based on DBM1708 (50% glass content by weight).

	ENGLISH UNITS	SI UNITS
Tensile (ASTM D 638)		
Strength	39.8 ksi	274 MPa
Modulus	2.18 msi	15.0 GPa
Compression (ASTM D 695)		
Strength	36.6 ksi	252 MPa
Modulus	2.06 msi	14.2 GPa
Flexural (ASTM D 790)		
Strength	69.9 ksi	482 MPa
Modulus	2.00 msi	13.8 GPa

OWENS CORNING
WORLD HEADQUARTERS
ONE OWENS CORNING PARKWAY
TOLEDO, OHIO 43659
1.800.GET.PINK
www.owenscorning.com/composites

EUROPEAN OWENS CORNING
FIBERGLAS S.A.
CHAUSSEE DE LA HULPE, 166
B-1170 BRUSSELS
BELGIUM
32.2.674.82.11

OWENS CORNING LATIN AMERICA
AV. DAS NAÇÕES UNIDAS, 17.891-30. AND.
CEP - 04795-100
SÃO PAULO, BRAZIL
55.11.5514.7900

OWENS CORNING ASIA/PACIFIC
HANOI BUILDING 3F
1-2-9 SHIKAKOEN, MINATO-KU
TOKYO, 105-0011 - JAPAN
81.3.5733.1671



COMPOSITE SOLUTIONS



INNOVATIONS FOR LIVING™

This information and data contained herein is offered solely as a guide in the selection of a reinforcement. The information contained in this publication is based on actual laboratory data and field test experience. We believe this information to be reliable, but do not guarantee its applicability to the user's process or assume any responsibility or liability arising out of its use or performance. The user agrees to be responsible for thoroughly testing any application to determine its suitability before committing to production. It is important for the user to determine the properties of its own commercial compounds when using this or any other reinforcement. Because of numerous factors affecting results, we make no warranty of any kind, express or implied, including those of merchantability and fitness for a particular purpose. Statements in this data sheet shall not be construed as representations or warranties or as inducements to infringe any patent or violate any law, safety code or insurance regulation.